


COMPONENT	VALUE	COMPONENT	VALUE	COMPONENT	VALUE	COMPONENT	VALUE
R1	47K	R21	220K (50K USA)	C1a-b	32µF + 32.57µF	F.E.T. 1	2N3820
R2	47K	R22	10K 1W	C2	.005µF	D6	1N4007
R3	47K	R23	56K (47K USA)	C3	.47µF	D7	1N914
R4	100K	R24	15K	C4	.022µF	V1	6CC83/12AX7
R5	15K	R25	4K7	C5	.005µF	V2	6CC83/12AX7
R6	100K	R26	1K	C6	500µF	PCB	JM 50
R7	—	VR1	1Meg LOG	C7	.047µF		
R8	100K	VR2	1Meg LIN	C8	.022µF		
R9	4K7	VR3	100K LOG	C9	.022µF		
R10	10K 1W	VR4	25K LIN	C10	1µF		
R11	10K	VR5	1Meg LOG	C11	1µF		
R12	1Meg	VR6	250K LIN	C12	.47µF		
R13	470R	VR7	25K LIN	C13	.022µF		
R14	1Meg	VR8	250K LIN	C14	.022µF		
R15	10K	VR9	1Meg LOG	C15	10µF		
R16	4K7			C16	.047µF		
R17	82K			C17	.005µF		
R18	100K			C18	1µF 63V		
R19	100K			C19	10µF 100V		
R20	220K (50K USA)	RV1	25K PRESET	C20	10µF 100V		

FUSE	VALUE	FUSE	VALUE
F1	120V 4AF	F5	1AC
F2	220V 2AC	F6	500MAE
F3	240V 2AC	F7	5AC
F4	4AC	F8	5AC
F5	100MAE	F9	5AC
F6	1AC	F10	5AC

NOTE! t denotes slow blow

component	value	component	value
R102	1K5 1/2W	OT1	C272
R103	1K5 1/2W	MT1	T414
R104	1K5 1/2W	CH1	C254
R105	1K5 1/2W		or
R106	1K5W		1A71-2
R107	1K5W		
R108	1K5W	VALVES	EL3-
R109	1K5W		6550 U
R110	56K2W		
R111	56K2W		
C102	2KpF		
C103	2KpF		
C104	50+50pF 500V		
C105	50+50pF 500V		
C106	50+50pF 500V		
C107	50+50pF 500V		
DI-5	1N4007		
RB	27K (15KUSA)		

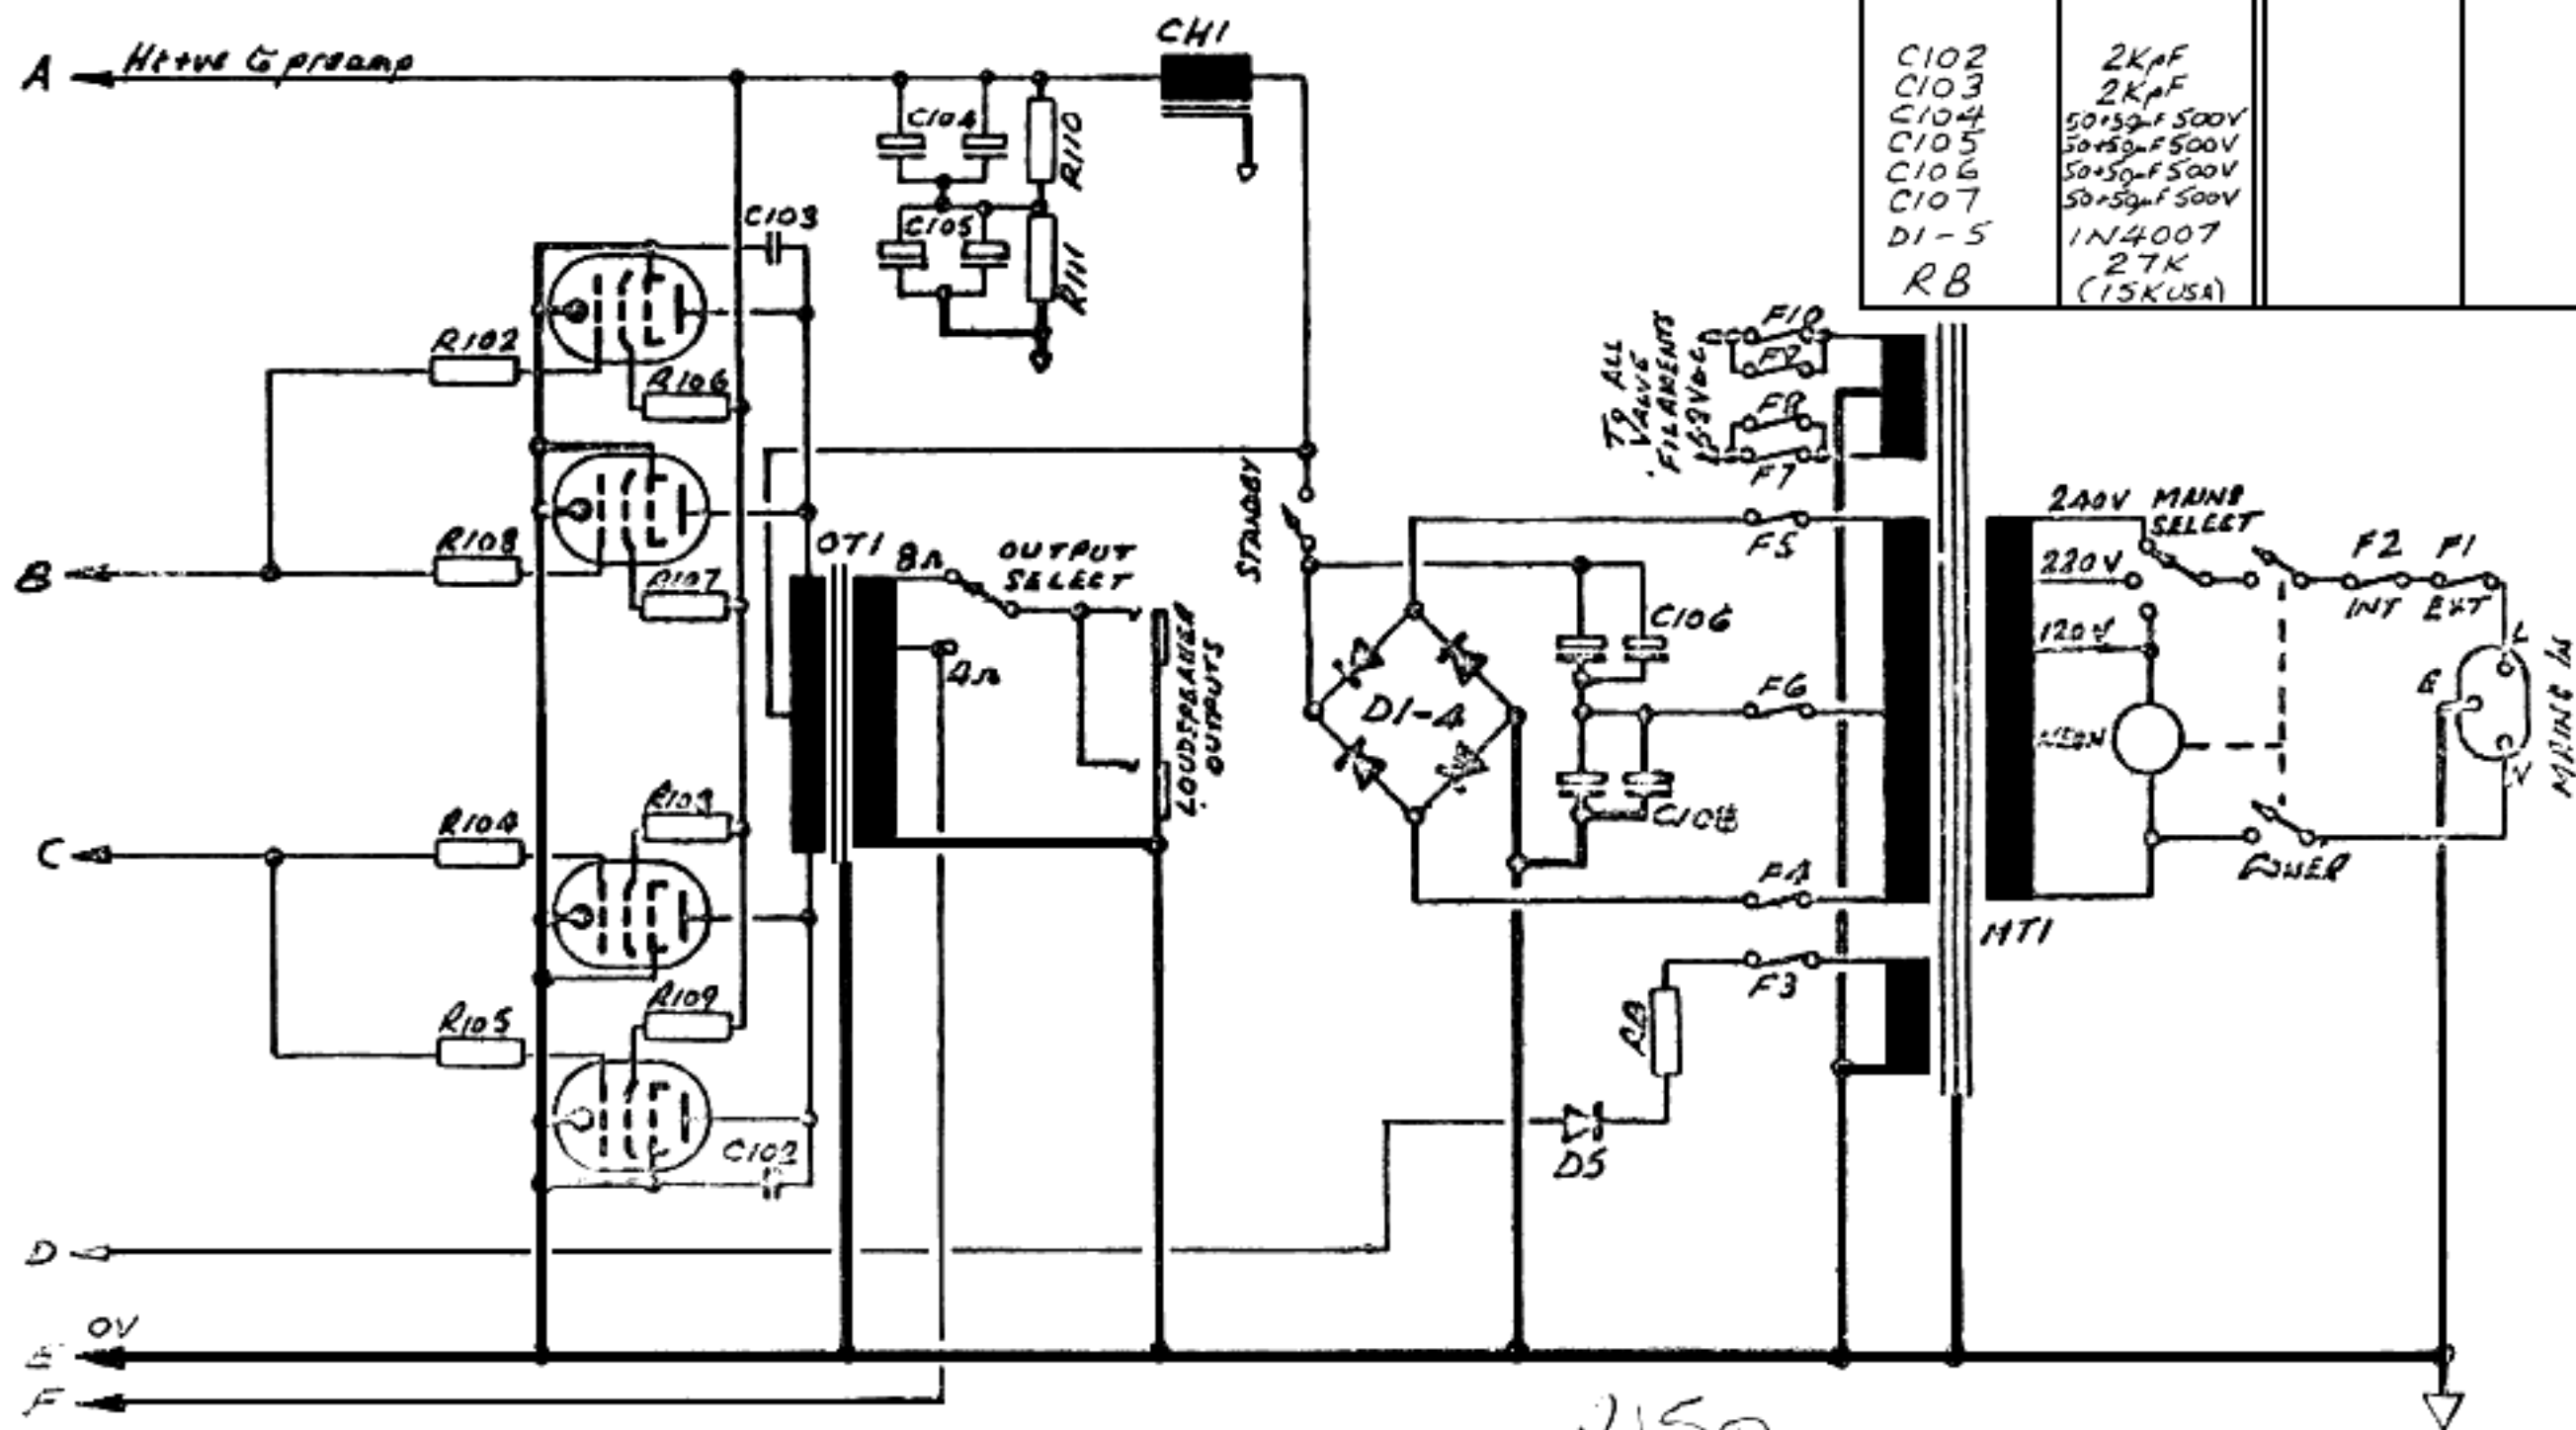

2150
4150

Marshall

POWERCEL & REVERB COMBO 100W O/P & POWER SUPPLY Dwg 78614-3

See 78614-1 & 2 for Preamps